

TSK

Tactive
self order kiosk



The Tactive TSK Self-Ordering kiosk is suitable for restaurants, QSR, fast-foods, and bistros that want to speed up ordering procedures, maximizing the management and efficiency of the point of sale, avoiding long and boring queues at the counter. Equipped with a 27" vertical monitor, the latest generation 10pt capacitive touch screen, QRcode reader, POS payment system, and 80mm thermal printer, the TSK is extremely versatile and resistant. The ergonomic design allows the integration of a wide range of options, while the strong structure is suitable for wall mounting or free-standing floor systems. The kiosk can also be customized in all RAL colors, or with permanent skin decorations available in multiple textures and customizations.

ENVIRONMENT

Indoor
IP20 (Nema 1) water proof
IP20 (Nema 1) dust proof
Temperature range from 0°C to +40°C

TECHNOLOGY AND USAGE

Compatible with multiple devices
Highly responsive 10T touch screen
Low power consumption
Frontal panel for 80mm thermal printer,
barcode reader and QR code reader

STRUCTURE

Anti-theft locks
Invisible screws and hinges
Robust structure
Wall-mounted or free standing design
Fully customizable frontal panel

AVAILABLE SIZES

landscape

27"



Innovative permanent skin decoration.
Realization of infinite decorative variables.



For more information visit www.fida.it

Copyright © 2022 Fida srl

Technical Specification

	TSK.P27	TSK.2P27
--	---------	----------

General

Screen orientation	Portrait	Portrait
Screen size (inch)	27"	27"
Screen active area (cm)	34 X 60	34 X 60
Display brightness (nit)	255	255
Screen resolution (pixel)	Full HD - 1920x1080	Full HD - 1920x1080
Contrast ratio (typ)	3000:1 (typ)	3000:1 (typ)
Viewing angle (H/V)	178° / 178°	178° / 178°
Backlight Life Cycle	50.000 hours	50.000 hours
System operation	20/7/365	20/7/365
Screen side	Single	Double
Touchscreen	PCAP 10P	PCAP 10P

Environment

Environment protection	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)
Sun exposure	not allowed	not allowed
Operating temperature	0°C / +40°C	0°C / +40°C
Environment humidity	10% - 80%	10% - 80%
Antivandal protection	IK04	IK04

Enclosure

Air cooling system	passive dissipation	passive dissipation
Enclosure material	galvanized steel + ABS/steel (door)	galvanized steel + ABS/steel (door)
Glass	Scratch-resistant	Scratch-resistant
Glass reflection	--	--
Standard enclosure color	Brown (RAL8019)	Brown (RAL8019)
Standard Door color	White (RAL9010)	White (RAL9010)

Power

Vac supply	230V AC +/- 10	230V AC +/- 10
Power consumption (typ)	60 W	120 W

Dimensions

Height (cm) [only monitor]	112 (*)	112 (*)
Width (cm)	55	55
Depth (cm)	19	25
Weight (Kg)	38	57
Notes	(*) 185 free standing	(*) 185 free standing

main


OPTIONS

- Camera Module
- Mini PC

- Client Logo
- Free-Standing

- Custom Graphics
- Fiscal Printer

- POS Stand Adapter

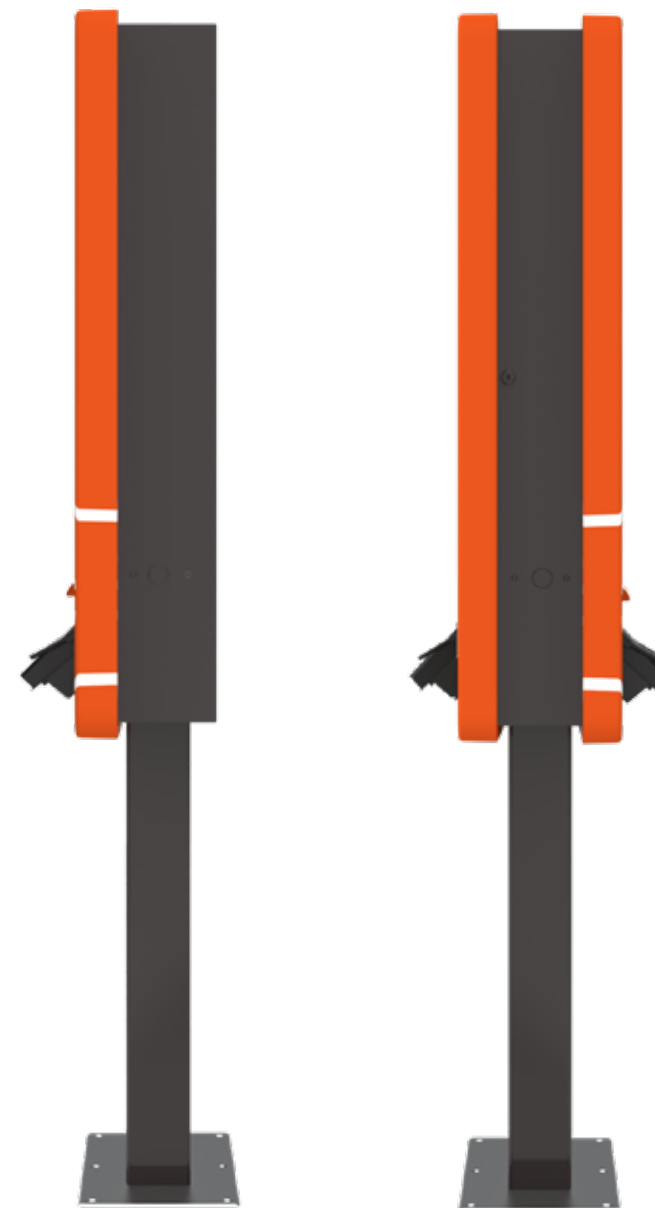

Single side

Double side